

CENTRAL INTELLIGENCE AGENCY  
INFORMATION REPORT

COUNTRY Poland  
SUBJECT Railroad Yards in Lublin

DATE DISTR. 4 Apr 1952  
NO. OF PAGES 3

50X1

PLACE ACQUIRED  
DATE ACQUIRED  
DATE OF INFORMATION

NO. OF ENCLS. 2  
(LISTED BELOW) (A) & (B)  
SUPPLEMENT TO REPORT NO.

*file*

THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE NATIONAL DEFENSE OF THE UNITED STATES, WITHIN THE MEANING OF TITLE 18, SECTIONS 793 AND 794, OF THE U.S. CODE, AS AMENDED. ITS TRANSMISSION OR REVELATION OF ITS CONTENTS TO OR RECEIPT BY AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW. THE REPRODUCTION OF THIS FORM IS PROHIBITED.

THIS IS UNEVALUATED INFORMATION

1. The main railroad station [Point "A", Enclosure (A)] measured approximately 1,000 x 300 meters. Six main tracks ran alongside of the depot with numerous tracks beyond them for switching and assembling freight. This depot contained three control points [Points "B", Enclosure (A)]. Approximately seven passenger trains traveled in the Warsaw direction every day.

50X1

Locomotives

2. All locomotives [ ] ran by steam. The locomotives used for long trips had a wheel alignment of 2-8-4, and the driving wheels were approximately 1.5 meters in diameter.

50X1

[ ] Trains that made short runs were smaller. Locomotives pulling freight had a wheel alignment of 2-10-2, and the diameter of the driving wheels was approximately 1.10 meters. Trains generally consisted of 50 to 70 various types of freight cars. [ ] the length of passenger locomotives [ ] 8-9 meters and the tenders, 3.5 meters. The tenders carried an estimated fuel load of 6-7 tons of coal with a 2,000 liter

50X1

50X1

50X1

50X1

50X1

CLASSIFICATION SECRET/SECURITY INFORMATION

	X		X																

SECRET

50X1

water capacity. Locomotives making local runs were about five meters in length without the tender. Most of the passenger locomotives making long trips seemed to be very new. Only older types were used for local runs.

Freight Cars

3. Freight cars consisted of boxcars, stock, refrigerator, gondola, flat and tank cars. They were of the two, four, six and eight axle types. The superstructure of boxcars, stock cars, refrigerator cars and gondolas was of wood reinforced with steel; while the flat and tank cars were all steel, had no sides, and the bed between the wheels dropped about one foot. This type also had eight wheels and was loaded with heavy construction steel. All cars had couplers of the link type and air brakes. [redacted] a great amount of scrap iron being shipped in the direction of Warsaw, but could not determine what material was being shipped in boxcars or tank cars.

50X1

Passenger Coaches

4. All passenger coaches [redacted] had four axles, were of wood construction covered with tin, and were the compartment type. Air brakes and link couplers were in evidence. Coaches making long runs were very new-looking, while those on local runs looked older. [redacted]

50X1

50X1

5. [redacted] approximately 20 old passenger cars and a large number of freight cars of all types parked beyond the main lines which looked as if they could be repaired and used. [redacted] several new-looking passenger coaches and freight cars parked there.

50X1

50X1

50X1

Freight Yards

6. [redacted] the freight yards are one-half kilometer in length, but can give no estimate on the width. Cars were switched by small steam propelled switch engines having a 2-6-0 wheel alignment. [redacted] two engines switching cars. Switches in the yard were hand-operated. [redacted] switches on the main line were electrically operated, because when the workmen threw the switches they were at what seemed to be a small control building. [redacted] point "C", Enclosure (A) [redacted] a semaphore signalling system, but do not know whether it was hand or electrically operated. The signalling system at the depot was electrical. [redacted] sketch, Enclosure (B) [redacted]

50X1

50X1

50X1

50X1

50X1

50X1

7. About 300 meters from the railroad station [redacted] Point "D", Enclosure (A) [redacted] building with four tracks leading into it which [redacted] was a locomotive repair shop, [redacted] men working there on the wheels and boiler of a locomotive. Not very far from this building was a coal dump [redacted] Point "E". Enclosure (A) [redacted] and near it a crane.

50X1

50X1

50X1

50X1

50X1

50X1

50X1

SECRET [redacted]

50X1

SECRET



-3-

Railroad Tracks

8. The six main tracks serving the railroad station were attached with screws to metal ties. The ties were about 60-70 cm apart and laid on a crushed stone ballast. Outside of the yards the rails were laid on wooden ties with metal plates in between the rails and ties. The plates measured approximately 30 x 15 x 1.5 cm. The rails were screwed onto the ties and were weighted with a crushed stone ballast all the way to Warsaw. The measurements of the rails were 15 cm high, five cm wide at the top and 10 cm wide at the base. They were of European standard gauge. The line was double-tracked all the way into Warsaw.

-end-

ENCLOSURE


- (A):  Sketch of Railroad Yards at Lublin  
(B):  Sketch of Signal Lights Seen Near  
Railroad Station at Lublin

50X1

SECRET/SECURITY INFORMATION

ENCLOSURE (A) SECRET SECURITY INFORMATION

50X1

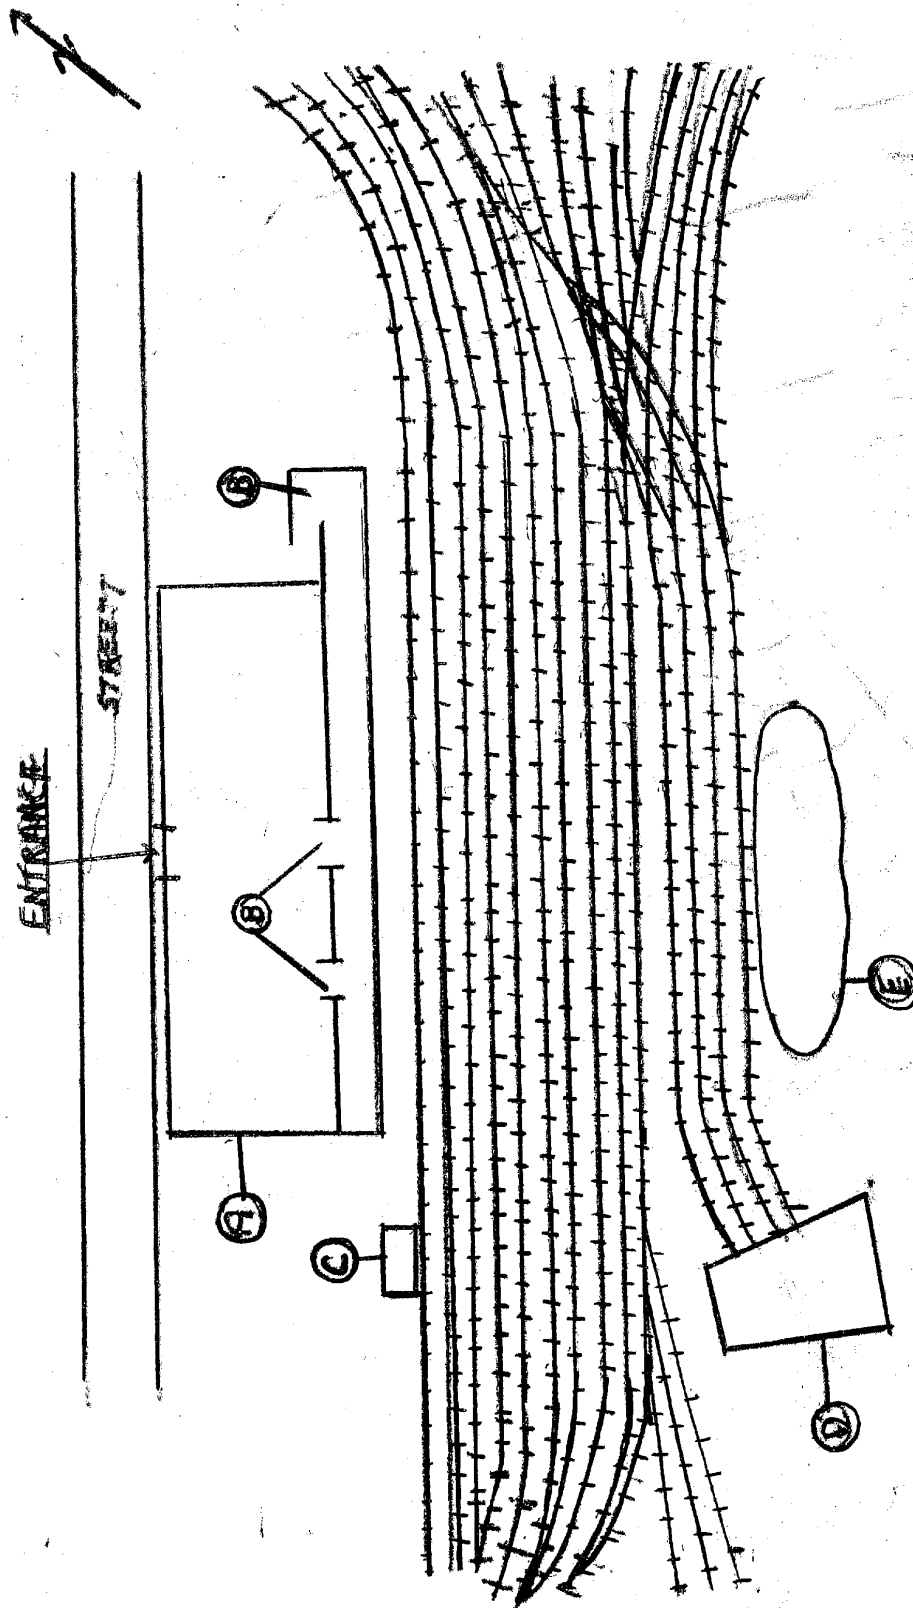

Sketch of  
Railroad Yards at Lublin  
5115N - 2234E


50X1

SECRET/SECURITY INFORMATION

ENCLOSURE (B)

SECRET/SECURITY INFORMATION

50X1

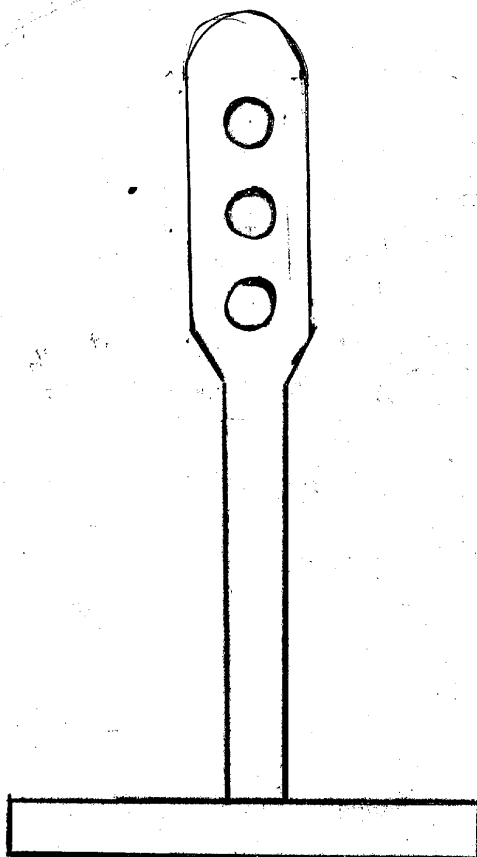

Sketch of

50X1

Signal Lights Seen Near  
Railroad Station at Lublin

5115N - 2234E

SECRET/SECURITY INFORMATION